# **SWORD CUSTOMER INFORMATION**

## **SCHWERT KUNDENINFORMATION**



### 1033-60 Care and Maintenance

Maintenance and re-processing of SAFE-EX Blade-Holder



#### **DISMANTLING:**

The SAFE-EX Blade Holder has to be dismantled before cleaning, as shown.

**Attention:** Don't remove the spring.

#### **CLEANING:**

Please consider our "Application guidance of autoclavable instruments and accessories according to DIN EN ISO 17664:2004"

**Pre-Treatment:** Use cleaning brush with nylon bristles when incrustations are heavy. **Cleaning:** Manual or mechanical — **Attention:** Cleaning in an thermal disinfector:

standing vertically, thread downwards.

**Rinsing:** Please use deionized water to avoid water spots. **Drying:** Use compressed air or air-dry (manual preparation).

#### **MAINTENACE:**

Oiling with Medical White Oil, as shown.


#### ASSEMBLY:


Assembly is made in reverse order to the dismantling.




**3297** 50 ml Paraffinum Perliquidum (Paraffin Oil / Medical White Oil)

For maintenance of instrument hinges and for use as sharpening oil. Physically harmless to DAB 10.

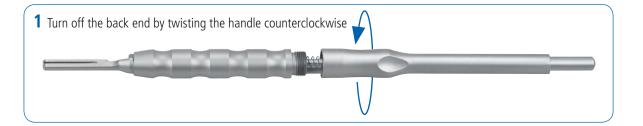

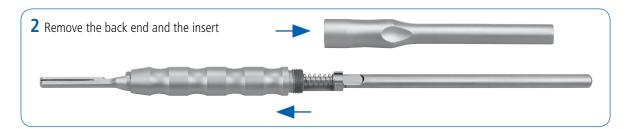

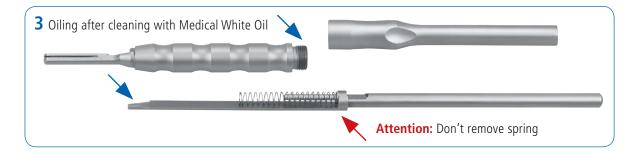

0703091009\_1033-60\_SAFE-EX\_AS\_BA\_e | 17.12.2015 | DIN EN ISO 17664:2004 | 1/1

 $\textbf{A. Schweickhardt GmbH \& Co. KG} \cdot \text{Tel.:} + 49\ 7464\ 98910\text{--}700 \cdot \text{Fax: -719} \cdot \text{contact@schwert.com} \cdot \text{www.schwert.com}$ 

